



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV gate valve, Series 140, DN 250 (10")
Ordering No. 14048-CE44

Description

Flange	CF-F 250
Actuator	Pneumatic, double acting – with solenoid valve – with position indicator
Feedthrough	Rotary feedthrough

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹ $< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-8}$ mbar to 1.2 bar (abs)
Differential pressure on the gate		≤ 1.2 bar
Differential pressure at opening		≤ 30 mbar
Conductance (molecular flow)		21 690 ls ⁻¹
Cycles until first service	– Unheated and under clean conditions	200 000
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Pneumatic actuator – Solenoid valve – Position indicator	≤ 150 °C ≤ 50 °C ≤ 50 °C ≤ 80 °C
Heating and cooling rate		50 °C h ⁻¹
Material (main components)	– Valve body – Mechanism	AISI 304 (1.4301) AISI 304 (1.4301)
Seal	– Bonnet – Gate – Actuator	FKM (Viton [®]), O-ring FKM (Viton [®]), O-ring FKM (Viton [®]), NBR
Mounting position		any
Volume of pneumatic actuator		0.75 l / 0.025 ft ³
Compressed air min. – max. overpressure		4 – 7 bar / 58 – 102 psi
Compressed air connection		G $\frac{1}{8}$ " ($\frac{1}{8}$ " NPT for USA)
Actuation time	– closing – opening	4.5 s 4.5 s
Weight		60 kg / 133 lbs
Behavior in case of compressed air pressure drop	– Valve closed – Valve open	valve remains closed undefined
Behavior in case of power failure	– Valve closed – Valve open	depending on customer installation depending on customer installation

Created by: SCHMC	Release date: 01.04.2019	1/2
Modified by:	Release date:	975263EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz


Product data sheet

HV gate valve, Series 140, DN 250 (10")
Ordering No. 14048-CE44

Electrical connections

Solenoid valve


Type 5/2 way
Voltage Defined by order

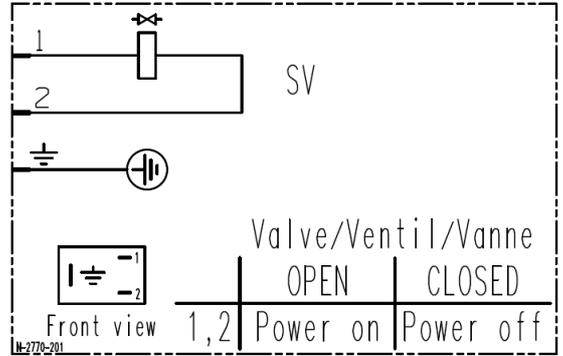

Wiring diagram

Position indicator

Type Micro switch
Voltage ≤ 250 V AC ≤ 50 V DC
Current max. ≤ 5 A ≤ 3 A

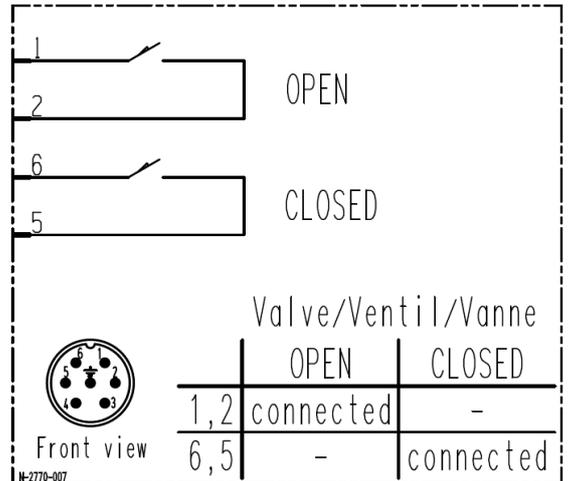

Wiring diagram

Created by: SCHMC	Release date: 01.04.2019	2/2
Modified by:	Release date:	975263EA